



## LINEAR ACTUATOR Type MICRO




### FEATURES:

Small, flexible and efficient  
12/24 VDC Motor  
Load up to 700 N  
Speed up to 18.5 mm/second  
Higher speed or higher load as option  
Encoder as option


# LINEAR ACTUATOR Type MICRO

## Speed vs Load

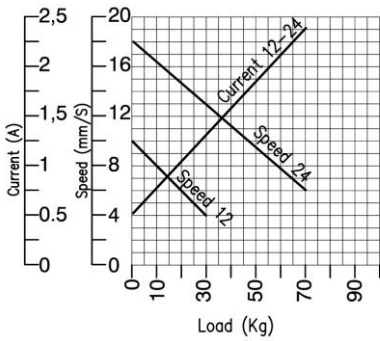

| TECHNICAL SPECIFICATIONS |          |
|--------------------------|----------|
| Gear ratio               | 1:12     |
| Nominal tension (V)      | 12/24    |
| Nominal load (Kg)        | 20/40    |
| Nominal current (A)      | 0,95/1,5 |
| Duty-cycle               | 80% 50%  |
| Maximal load (Kg)        | 30/70    |
| Unload speed (mm/s)      | 8,6/18,5 |

## Filter

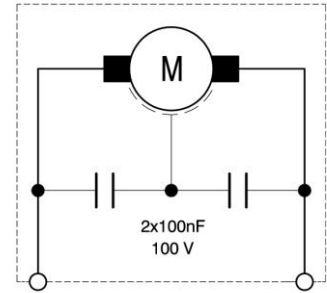

Micro is available with separately spindle for customer solutions or in strokes from 50 to 300 mm. Standard stroke is 200 mm.

Faston 4.8 x 0.5

